


SUNCAR

Curved carport with 4/6 posts



The **SUNCAR** aluminum Carport is the perfect solution to shelter your vehicles (car, motorcycle, bicycle) from exposure to rain, frost, dew and above all UV rays, allowing them to be preserved for longer in better condition.

Colours



RAL Colours
Other colours
on request

Settings

Extend in parallel



Side Joint Kit
Available
(Side/Side)

Extend in line



End Junction
Kit Available
(Top/Top)

Advantages



Allow the passage of light,
protecting from UV rays



Protects from
wind and rain



Protects from frost,
ice and snow



Protects from exposure to
high temperatures




Quick and easy to
install or remove


Technical information

Standard:


Ref.	Height (mm)	Width (mm)	Length (mm)	Distance between posts (mm)	Maximum Height (mm)	Posts	Crossbeams	Gutters	RAL
WSC000	2100	3000	5000	2964	2430	4	6	2	7016 STR
WSC010	2500	3000	5000	2964	2830	4	6	2	7016 STR
WSC001	2100	3000	5000	2964	2430	4	6	2	9016/770
WSC011	2500	3000	5000	2964	2830	4	6	2	9016/770

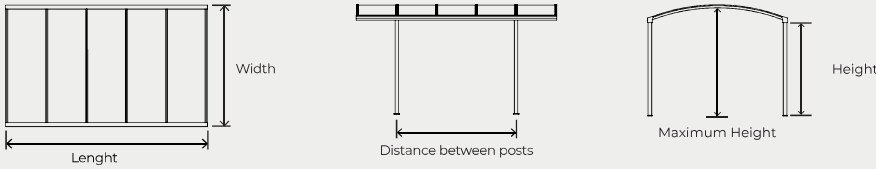

Ref.	Height (mm)	Width (mm)	Length (mm)	Distance between posts (mm)	Maximum Height (mm)	Posts	Crossbeams	Gutters	RAL
WSC020	2100	3000	6000	1980 + 1980	2430	6	7	2	7016 STR
WSC030	2500	3000	6000	1980 + 1980	2830	6	7	2	7016 STR
WSC021	2100	3000	6000	1980 + 1980	2430	6	7	2	9016/770
WSC031	2500	3000	6000	1980 + 1980	2830	6	7	2	9016/770

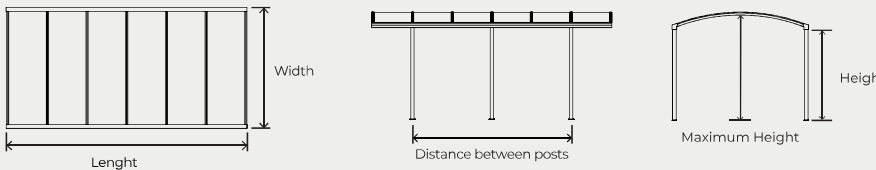

Ref.	Height (mm)	Width (mm)	Length (mm)	Distance between posts (mm)	Maximum Height (mm)	Posts	Crossbeams	Gutters	RAL
WSC040	2100	3000	7000	1983 + 2974	2430	6	8	2	7016 STR
WSC050	2500	3000	7000	1983 + 2974	2830	6	8	2	7016 STR
WSC041	2100	3000	7000	1983 + 2974	2430	6	8	2	9016/770
WSC051	2500	3000	7000	1983 + 2974	2830	6	8	2	9016/770

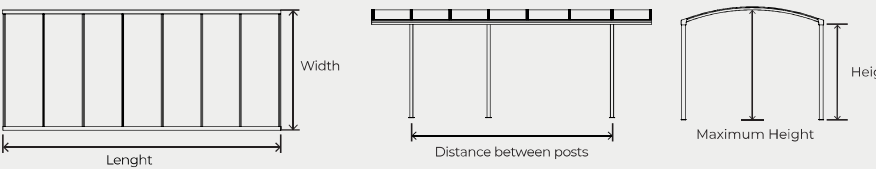

Bespoke:

Other dimensions on request.



Features:


- Posts: **80x80mm**
- Crossbeams: **60x50mm**
- Gutter: **100x116mm**
- Cellular polycarbonate **6mm anti UV**
- Thermo-lacquered aluminum
- EPDM Sealants
- Fixing screws included
- Screwing base

Maximum load:



* tested by certified lab (Itecons NB 2211)
Standard - 4 Posts

Polycarbonate

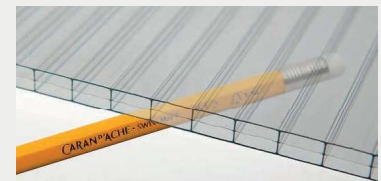

6mm cellular polycarbonate with anti UV treatment.

Delivered in two ready-to-install packages

