

# ULISS

Curved carport with 2/3 posts



With an urban and contemporary design, the **ULISS** carport is equipped with a polycarbonate cover that allows light to pass through and reduces heat, protecting from UV rays.

With a high level of light, the Uliss aluminum carport is ideal for protecting your vehicles (car, motorcycle, bicycle) from exposure to rain, frost and dew, and above all from UV rays.

## Colours



RAL Colours  
Other colours  
on request

## Settings






Y positioning



Extend in line




## Advantages

-  Allow the passage of light, protecting from UV rays
-  Protects from wind and rain
-  Protects from frost, ice and snow
-  Protects from exposure to high temperatures
-  High shock resistance


# Technical information

## Standard:

Ref.	Height (mm)	Width (mm)	Length (mm)	Distance between posts (mm)	Maximum Height (mm)	Posts Height (mm)	Posts	Gutters	RAL
WUS160	2200	3000	5000	3000	2868	2289	2	1	7016 STR

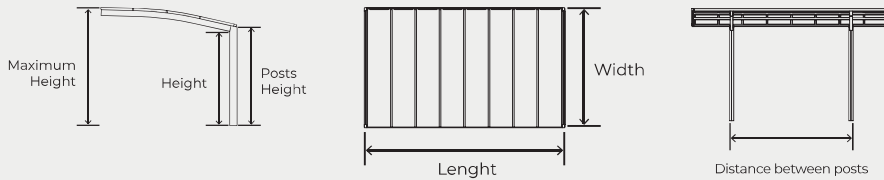

Ref.	Height (mm)	Width (mm)	Length (mm)	Distance between posts (mm)	Maximum Height (mm)	Posts Height (mm)	Posts	Gutters	RAL
WUL160	2200	3000	5000	1830 + 1830	2868	2289	3	1	7016 STR

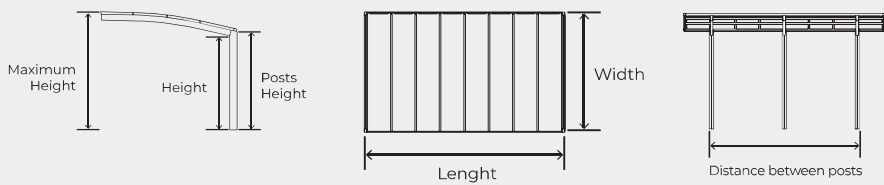

## Additional information:

### Snow/wind load

Wind climatic action according to Eurocode 1 EN 1991-1-4;

Snow climatic action according to Eurocode 1 EN 1991-1-3;

The carports are available in different snow and wind resistance to meet different regional requirements. DIN 1055/EN1991, 1-3/1-4.

The requirements of your place of residence can be consulted with the local authorities.

Example: For a snow depth of 20cm «falling for a some days».

$$500 \text{ kg/m}^3 \times 0,2\text{m} = 100\text{kg/m}^2$$

### License

Usually no license is required. However, Gardengate recommends clarification with your municipality.

## Features:

- Posts: **160x110mm**
- Crossbeams: **51x37mm**
- Gutters: **79x61mm**
- Cellular polycarbonate **2mm anti UV**
- Thermo-lacquered aluminum
- Galvanized steel squares
- EPDM Sealants
- Fixing screws included
- Tube for water passage
- Posts to set in concrete

### Maximum load:



\*tested by certified lab (Itecons NB 2211)

## Polycarbonate



2mm cellular polycarbonate with anti UV treatment.

Delivered in two ready-to-install packages